

# RG-AP810-I **Wi-Fi 6 Dual-radio Indoor Access Point**



Scan QR Code For More Enquiry





# **Product Overview**

The RG-AP810-I is a Wi-Fi 6 wireless access point that integrates dual radios, high performance, and enterprisegrade encryption technology. Due to the hybrid cloud management mode and high-density access design, it is suitable for flexible deployment in high-quality network scenarios, such as classroom, dormitory, and office scenarios in the education industry, production workshop and warehouse scenarios in the manufacturing industry, outpatient clinics and mobile ward rounds scenarios in the medical industry, boutique hotels, and retail shops.

## **Product Highlights**



### Cost-effectiveness and High Speed

- Dual-band design (2.4 GHz + 5 GHz), four spatial streams, 1024-Quadrature Amplitude Modulation (QAM) high-speed access, and up to 1.775 Gbps peak data rate, realizing high-speed wireless access experience
- Orthogonal Frequency-Division Multiple Access (OFDMA), Multi-User Multiple-Input Multiple-Output (MU-MIMO), and Wi-Fi Multimedia (WMM), increasing the average rate per user in high-density deployment environments
- RF power adjustment and intelligent channel allocation to solve the problems such as co-channel interference and adjacent channel interference, thereby improving network transmission efficiency and stability

### Intelligent networking

- Local and cloud management modes, and intelligent wireless network optimization, reducing TCO and maximizing ROI
- Intelligent power monitoring, which monitors PoE output power and disables or enables some functions according to the available power to ensure normal operation of the AP

- IEEE 802.11k/v/r support and roaming stickiness optimization, achieving seamless user roaming
- Rich IoT features: PoE power, Bluetooth 5.1, support for iBeacon, and wireless locating

### High Security and Reliability

- Encryption and authentication technologies including Wi-Fi Protected Access 3 (WPA3), enhanced open security, 802.1X, and Private Pre-shared Key (PPSK), enhancing data security
- Dynamic Frequency Selection (DFS), optimizing the use of available RF spectrum to prevent radar channel interference
- Cyclic Delay/Shift Diversity (CDD/CSD), Maximum Ratio Combining (MRC), Space-Time Block Coding (STBC), and Low-Density Parity Check (LDPC), improving the signal quality, signal receiving, and reliability and performance of data transmission
- Transmit beam-forming (TxBF) expands the signal coverage and enhances the reliability of specific devices, thereby improving the data rate
- Intelligent identification and monitoring, multicastto-unicast conversion, and other features, enhancing network security and reliability

# **Applicable Scenarios**

### **Higher Education**

#### **Classroom and Lab**

Deploying Wi-Fi in classrooms and labs enables students and teachers to access network resources with ease, thereby enhancing the quality of teaching and learning. Students can engage in online learning, access course materials, and collaborate with classmates, while teachers can access teaching resources and deliver multimedia lessons.



#### Library

Wi-Fi deployment in libraries facilitates quick access to online resources such as e-books and academic papers for research and study by students and teachers.



### Healthcare

#### **Outpatient Service**

The Wi-Fi network provides a mobile office environment for medical staff. Medical staff can use mobile devices to view patient information in real time, which significantly improves treatment efficiency. Patients can access relevant medical information through smart devices online, resulting in improved satisfaction.



**Remote Monitoring and Management of Medical Devices** With Wi-Fi deployment, remote monitoring and management of medical devices become possible. Wireless medical devices such as ECG monitors and blood pressure monitors can transmit patient data in real time, thereby improving information security. Additionally, these wireless medical devices can be easily maintained and upgraded, resulting in cost reductions.



### **Hotel Apartments**

#### Chain Hotels

By deploying a Wi-Fi network, travelers can enjoy convenient, high-speed Internet access to ensure a fulfilling stay.



# **Product Features**

### Multi-scenario Adaptability

The RG-AP810-I, a dual-band wall-mounted wireless access point, is ideal for a wide range of applications, including higher education, government, general education, finance, and business sectors, providing flexible solutions to meet diverse service needs.

### High-speed Access and Compatibility

The RG-AP810-I supports various wireless protocols, such as 802.11ax, 802.11ac Wave2, 802.11ac Wave1, and 802.11n. It features a hardware-independent dualband design to deliver a data rate of up to 1.775 Gbps, effectively eliminating wireless performance bottlenecks. Additionally, it is compatible with an extensive array of devices, promoting seamless interconnectivity among employees and customers.

### Security and Scalability

The RG-AP810-I stands out with its exceptional wireless network security, RF control, mobile access, QoS guarantee, and seamless roaming. With Ruijie's wireless access controller (AC), it enables wireless user data forwarding, security, and access control to cope with diverse service needs.

### Flexible Deployment and Power Supply

The RG-AP810-I supports both local power supply and Power over Ethernet (PoE), providing you with the flexibility to choose the power supply mode. In addition, the RG-AP810-I can be mounted against a wall or ceiling, making space deployment and environmental requirements less challenging. This makes the RG-AP810-I particularly suitable for scenarios such as large campuses, conference centers, enterprise offices, and operation hotspots.

## **Solution Scalability Capabilities**

Ruijie WIS Cloud Management Network Solution (WIS for short) provides full-lifecycle cloud management network services covering network procurement, planning, deployment, acceptance, and O&M. When the AP connects to WIS, it can meet various needs in multiple scenarios including planning, deployment, acceptance, and operation through cloud management, cloud O&M, cloud authentication, and other value-added services provided by WIS.

### Network-wide Cloud Management

WIS supports integrated management and control of various types of devices including APs, ACs, switches, gateways, and routers. It supports remote O&M management operations such as adding or batch importing of multi-branch network devices, online status monitoring, configuration delivery, upgrade, restart, configuration backup, and restoration. It supports network-wide topology auto-discovery and topology status monitoring.

| Sarrar                    |    | Cloud A. | 5 59 FEA | Ps (00) ACs (0 | 0) Bwitches (00) G | iteways (60) Route | rs (60) IOT Devi | ces (50) Firevals | 60)            | + A00 De       | e Impot Expot          | Enter an SN or      |         | ۹ 0         |
|---------------------------|----|----------|----------|----------------|--------------------|--------------------|------------------|-------------------|----------------|----------------|------------------------|---------------------|---------|-------------|
| 2 My Stes                 | •  |          | Status v | Device Name    | SN                 | MAC Address        | Device Model     | Ste               | Management IP  | Egress Address | Number of Online Users | Last Offine Time    | Remarks | Operation   |
| · Overview                |    |          | • Online | TES            | 1234942570043      | 5869.6c23.5428     | AP730(TR)        | Cloud-AP-Demo     | 39-38-0 106    | 96 95 82 52    | 0                      | 2023-06-05 23 29:07 |         | Details -   |
| Network Con               | 10 |          | - Offine | AP713-A        | 1254542570021      | 0624 4062 4668     | AP713-A          | Cloud-AP-Demo     | 10 110 242 20  | 95.98.82.52    | 0                      | 2023-06-06 01:43:45 |         | Details -   |
| Devices                   |    |          | - Office | APRIDI         | G1MQAWQ000482      | 0074 (cbd.ab/0     | AP8431           | Cloud AP Demo     | 192.168.100.2  | 112.5.155.8    | 0                      | 2023-03-27 01:57:01 |         | Details -   |
| Topology     Cotimization |    |          | - Offine | APISSH         | G1NW18A001487      | 0005.005a.eef0     | AP000H           | Cloud-AP-Demo     | 10 110 242 200 | 210.06.91.195  | 0                      | 2023-03-22 20:41:48 |         | Details -   |
| STAININ                   | Ĵ. |          | + offine | AP823-A00      | G1PD3G2000694      | 5005 55ba e3x2     | AP(525-A(X)      | Cloud-AP-Demo     | 10 110 242 202 | 112.111.6.151  | 0                      | 2023-03-27 20.25.09 |         | Defails 1 - |
| Access Security           |    |          | + Offine | 4820v1         | G10H16J000738      | c008.e6d0.c36a     | AP4820           | Cloud-AP-Demo     | 172.30.101.6   | 112 111 6 181  | 0                      | 2022-08-29 01:06:20 |         | Details -   |
| Alams                     | -  |          | · Office | AP823-L-V2     | G10PED000072A      | 9c2b.a643.0045     | AP020-L(V0)      | Cloud-AP-Demo     | 10 104 122 149 | 210.66.91.195  | 0                      | 2023-04-19 23:58:26 |         | Details     |
| Export                    |    |          | - Offine | AP733-L        | MACC942570080      | 0040 #23.5367      | AP733-L          | Cloud-AP-Demo     | 39.38.0.57     | 45.127.187.248 | 0                      | 2023-01-12 01:51:56 |         | Details     |
|                           |    |          | - office | Five           | ZARC0Y1001545      | 7042,4332,7159     | AP820-L(V2)      | Cloud AP-Demo     | 39 30 0 161    | 95.95.52.52    | 0                      | 2023-06-02 06 10:33 |         | Details -   |

#### Wireless Network Visualization

The overview function module of WIS provides a comprehensive view of the network running status from the perspective of overview, experience, users, devices, and environment. The network running information includes the following items:

• Network basic information: device stability, device

health, user stability, network signal coverage, and network association.

- User usage: user activity (network dependency), and user online experience and analysis.
- Network saturation: network capacity usage and channel usage.

### Intelligent Network Diagnosis

With WIS, wireless network diagnosis and health index assessment can be completed in just one click, providing test results for each item. The health index provided by WIS enables you to rapidly assess the state of your live network. WIS can locate faulty areas, APs, and STAs, and provides potential risks and corresponding optimization suggestions.

| ∙₩i   | Home My Network Management & Maintenance | Intelligent Analysis                 | System Management   | + Add Sile  | Home My                      | hj Network Management & Mantenarce Distingent Awagement System Management + Add Sole 🕃 🚃 🛙  |          |
|---|--|--------------------------------------|---|---|------------------------------|---|----------|
| Please entir MAC or name  | ]II] Overview                            |                                      |   | 2023-06-06  | Phase etter MAC at name      | ala 20196/8   |          |
| (a) Montong .   | Client Activation 0 Pust                 | 0<br>Accumulated Chemis<br>Rectartic | Equipment Stability 0         0 | One key diagneess " The report of yestendary, Found & potential problem(s) in<br>total STA Access Stability 0 " | Londong ,     Optimization - | 2023-06-05 (Network Health Index 100.0  |          |
| Experience<br>Clients<br>Devices  |  |                                      | Cart Admin Good   | 100% 100%<br>StAcess<br>Increasion  | Access Optimization The I    | Sext<br>Textures Asian<br>Company and intervention of the K-s is aligned to a sign of the OV usage and reading y and part of the K-s is the K-s is the OV usage translated is the reading<br>of the operation of the K-s is a signed to a sign of the OV usage and reading y and parts have been been been been been been been be | ry usage |
| Environment     (i) Optimization ,     (ii) Security     (iii) Dig Data , | Network Saturation ©                     |                                      | Manual Jacobie  | Signal Coverage 0 >   | Security     AP C            |   |          |
| (B) Toottox   | ⊜ (                                      | >                                    |   | Petite-Cenerge APh 0<br>The affected cares 0  |                              | Bouven in terms the<br>CALA Mill Hill Gala CAL Alf Spring Links was the head in another in terms (in a fill of the fill perfilter, and perfilter, and perfilter, and perfilter<br>Bouven 2<br>Result 2  |          |
|   | User Experience © Time:                  | Top 1                                | Class   | 16<br>Good 📷 Average 🧰 Tair 📷 Hand to go online   | Cont<br>Rany AC              | NRIN CHAR () 0<br>NRIJANIN CHAR () VALIA () MARIA<br>CRI<br>CRI<br>CRI<br>CRI<br>CRI<br>CRI<br>CRI<br>CRI<br>CRI<br>CRI   |          |
|   |  |                                      |   | ۵   | Area Chec                    | ed ý  |          |

## **Product Specifications**

### Hardware Specifications

| Hardware Specifications | RG-AP810-I  |
|-------------------------|---|
| 802.11n                 | Four spatial streams<br>• Radio 1 – 2.4 GHz: 2x2 MIMO, two spatial streams<br>• Radio 2 – 5 GHz: 2x2 MIMO, two spatial streams<br>Channels:<br>• Radio 1 – 2.4 GHz: 20 MHz and 40 MHz<br>• Radio 2 – 5 GHz: 20 MHz and 40 MHz<br>Combined peak data rate: 600 Mbps<br>• Radio 1 – 2.4 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS15)<br>• Radio 2 – 5 GHz: 6.5 Mbps to 300 Mbps (MCS0 to MCS15)<br>Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM)<br>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM<br>Packet aggregation:<br>• Aggregate MAC Protocol Data Unit (A-MPDU)<br>• Aggregate MAC Protocol Data Unit (A-MSDU)<br>Dynamic Frequency Selection (DFS)<br>Cyclic Delay/Shift Diversity (CDD/CSD)<br>Maximum Ratio Combining (MRC)<br>Space-Time Block Coding (STBC)<br>Low-Density Parity Check (LDPC)<br>Transmit beam-forming (TxBF) |

| Hardware Specifications | RG-AP810-I  |
|-------------------------|---|
| 802.11ac                | Two spatial streams<br>• Radio 2 - 5 GHz: 2x2 MIMO, two spatial streams<br>Channels:<br>• Radio 2 - 5 GHz: 20 MHz, 40 MHz, and 80 MHz<br>Combined peak data rate: 867 Mbps<br>• Radio 2 - 5 GHz: 6.5 Mbps to 867 Mbps (MCS0 to MCS9)<br>Radio technologies: Orthogonal Frequency-Division Multiplexing (OFDM)<br>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM<br>Packet aggregation:<br>• Aggregate MAC Protocol Data Unit (A-MPDU)<br>• Aggregate MAC Service Data Unit (A-MSDU)<br>Dynamic Frequency Selection (DFS)<br>Cyclic Delay/Shift Diversity (CDD/CSD)<br>Maximum Ratio Combining (MRC)<br>Space-Time Block Coding (STBC)<br>Low-Density Parity Check (LDPC)<br>Transmit beam-forming (TxBF)   |
| 802.11ax                | Four spatial streams<br>• Radio 1 - 2.4 GHz: 2x2 uplink/downlink MU-MIMO , two spatial streams<br>• Radio 2 - 5 GHz: 2x2 uplink/downlink MU-MIMO, two spatial streams<br>Channels:<br>• Radio 1 - 2.4 GHz: 20 MHz and 40 MHz<br>• Radio 2 - 5 GHz: 20 MHz, 40 MHz, and 80 MHz<br>Combined peak data rate: 1.775 Gbps<br>• Radio 1 - 2.4 GHz: 8.6 Mbps to 0.574 Gbps (MCS0 to MCS11)<br>• Radio 2 - 5 GHz: 8.6 Mbps to 1.201 Gbps (MCS0 to MCS11)<br>Radio technologies: uplink/downlink Orthogonal Frequency-Division Multiple Access (OFDMA)<br>Modulation types: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM<br>Packet aggregation:<br>• Aggregate MAC Protocol Data Unit (A-MPDU)<br>• Aggregate MAC Service Data Unit (A-MSDU)<br>Dynamic Frequency Selection (DFS)<br>Cyclic Delay/Shift Diversity (CDD/CSD)<br>Maximum Ratio Combining (MRC)<br>Space-Time Block Coding (STBC)<br>Low-Density Parity Check (LDPC)<br>Transmit beam-forming (TxBF)<br>WPA3 |
| Antenna                 | <ul> <li>Wi-Fi</li> <li>2.4 GHz: two built-in omnidirectional antennas, the max. antenna gain is 2.8 dBi.</li> <li>5 GHz: two built-in omnidirectional antennas, the max. antenna gain is 3.6 dBi.</li> <li>Bluetooth</li> <li>One onboard Bluetooth with built-in omnidirectional antenna, the max. antenna gain is 2.4 dBi.</li> </ul>  |
| Port                    | 1 x 10/100/1000Base-T RJ45 Ethernet port with auto-negotiation<br>1 x RJ45 console port (serial console port)<br>1 x Bluetooth 5.1  |

INNOVATION

Beyond Networks

| Hardware Specifications             | RG-AP810-I  |
|-------------------------------------|---|
| Status LED                          | <ol> <li>x multi-color system status LED</li> <li>AP power-on status</li> <li>Software initialization status and upgrade status</li> <li>Uplink service interface status</li> <li>Wireless user online status</li> <li>CAPWAP tunnel timeout</li> <li>Specific AP locating</li> </ol>   |
| Button                              | <ol> <li>x Reset button</li> <li>Press the button for shorter than 2 seconds. Then the device restarts.</li> <li>Press the button for longer than 5 seconds. Then the device restores to factory settings.</li> </ol>   |
| Dimensions (W x D x H)              | Main unit: 220 mm x 220 mm x 49 mm (8.66 in. x 8.66 in. x 1.93 in.)<br>Shipping: 507 mm x 319 mm x 278 mm (19.96 in. x 12.56 in. x 10.74 in.)   |
| Weight                              | Main unit: 0.6kg (1.33 lbs)<br>Mounting bracket: 0.07kg (0.15 lbs)<br>Shipping: 1.04 kg (2.29 lbs)  |
| Mounting                            | Wall/Ceiling-mount (a mounting bracket is delivered with the main unit)   |
| Lock option                         | Kensington lock and securing latch  |
| Input power supply                  | <ul> <li>The AP supports the following two power supply modes:</li> <li>48 V DC/0.3 A power input over DC connector: The DC connector accepts 2.1 mm/5.5 mm center-positive circular plug. A DC power supply needs to be purchased independently.</li> <li>PoE input over LAN 1: The power source equipment (PSE) complies with IEEE 802.3af standard (PoE).</li> <li>Note: If both DC power and PoE are available, DC power is preferred.</li> </ul> |
| Power consumption                   | Maximum power consumption: 12.95 W<br>• DC powered: 12.95 W<br>• PoE++ powered (802.3bt): 12.95 W<br>• PoE+ powered (802.3at): 12.95 W<br>• PoE powered (802.3af): 12.95 W<br>• Idle mode: 6 W  |
| Environment                         | Storage temperature: –40°C to +70°C (–40°F to +158°F)<br>Storage humidity: 5%RH to 95%RH (non-condensing)<br>Operating temperature: –10°C to +50°C (14°F to 122°F)<br>Operating humidity: 5% RH to 95% RH (non-condensing)<br>At an altitude between 3,000 m (9,842.52 ft.) and 5,000 m (16,404.20 ft.), every time the altitude<br>increases by 166 m (546.81 ft.), the maximum temperature decreases by 1°C (1.8°F).                                |
| Mean Time<br>Between Failure (MTBF) | 200,000 hours (22 years) at the operating temperature of 25°C (77°F)  |
| System memory                       | 512 MB DRAM, 128 MB flash   |
| Max. transmit<br>power              | <ul> <li>2.4 GHz: 26 dBm (398 mW)</li> <li>5 GHz: 26 dBm (398 mW)</li> <li>Note:</li> <li>Adjusting the transmit power by percentage (recommended) and in 1 dBm increments.</li> <li>The transmit power is limited by local regulatory requirements.</li> </ul>   |

The following table lists the radio frequency performance of Wi-Fi including different frequency bands, protocols, and date rates. It is country-specific, and Ruijie Networks reserves the right of interpretation.

| Radio Frequency Performance | RG-AP810-I |   |   |  |  |
|-----------------------------|------------|---|---|--|--|
| Frequency Band and rotocol  | Data Rate  | Max. Transmit Power per<br>Transmit Chain | Max. Receive Sensitivity<br>per Receive Chain |  |  |
|                             | 1 Mbps     | 23 dBm                                    | –91 dBm                                       |  |  |
| 2.4.002.115                 | 2 Mbps     | 23 dBm                                    | -91dBm  |  |  |
| 2.4 GHz, 802.11b            | 5.5 Mbps   | 23 dBm                                    | -90 dBm                                       |  |  |
|                             | 11 Mbps    | 23 dBm                                    | -87 dBm                                       |  |  |
|                             | 6 Mbps     | 23 dBm                                    | –89 dBm                                       |  |  |
| 2.4.015, 902, 114           | 24 Mbps    | 22 dBm                                    | -82 dBm                                       |  |  |
| 2.4 GHz, 802.11g            | 36 Mbps    | 22 dBm                                    | -78 dBm                                       |  |  |
|                             | 54 Mbps    | 20 dBm                                    | -72 dBm                                       |  |  |
| 2.4.011-002.14-001720)      | MCS0       | 23 dBm                                    | -85 dBm                                       |  |  |
| 2.4 GHz, 802.11n (HT20)     | MCS7       | 19 dBm                                    | -67 dBm                                       |  |  |
| 2.4.511-002.44(1740)        | MCS0       | 23 dBm                                    | -82 dBm                                       |  |  |
| 2.4 GHz, 802.11n (HT40)     | MCS7       | 19 dBm                                    | -64 dBm                                       |  |  |
| 2.4.511-002.44(11520)       | MCS0       | 23 dBm                                    | -85 dBm                                       |  |  |
| 2.4 GHz, 802.11ax (HE20)    | MCS11      | 15 dBm                                    | -58 dBm                                       |  |  |
|                             | MCS0       | 23 dBm                                    | -82 dBm                                       |  |  |
| 2.4 GHz, 802.11ax (HE40)    | MCS11      | 15 dBm                                    | –54 dBm                                       |  |  |
|                             | 6 Mbps     | 23 dBm                                    | -89 dBm                                       |  |  |
| 5 614- 992 11-              | 24 Mbps    | 22 dBm                                    | -82 dBm                                       |  |  |
| 5 GHz, 802.11a              | 36 Mbps    | 22 dBm                                    | -78 dBm                                       |  |  |
|                             | 54 Mbps    | 20 dBm                                    | -72 dBm                                       |  |  |

| Radio Frequency Performance | RG-AP810-I |   |   |  |  |
|-----------------------------|------------|---|---|--|--|
| Frequency Band and rotocol  | Data Rate  | Max. Transmit Power per<br>Transmit Chain | Max. Receive Sensitivity<br>per Receive Chain |  |  |
|                             | MCS0       | 23 dBm                                    | –85 dBm                                       |  |  |
| 5 GHz, 802.11n (HT20)       | MCS7       | 19 dBm                                    | –67 dBm                                       |  |  |
|                             | MCS0       | 23 dBm                                    | -82 dBm                                       |  |  |
| 5 GHz, 802.11n (HT40)       | MCS7       | 19 dBm                                    | -64 dBm                                       |  |  |
|                             | MCS0       | 23 dBm                                    | -85 dBm                                       |  |  |
| 5 GHz, 802.11ac (VHT20)     | MCS9       | 18 dBm                                    | –60 dBm                                       |  |  |
|                             | MCS0       | 23 dBm                                    | -82 dBm                                       |  |  |
| 5 GHz, 802.11ac (VHT40)     | MCS9       | 18 dBm                                    | –57 dBm                                       |  |  |
|                             | MCS0       | 23 dBm                                    | –79 dBm                                       |  |  |
| 5 GHz, 802.11ac (VHT80)     | MCS9       | 18 dBm                                    | –53 dBm                                       |  |  |
|                             | MCS0       | 23 dBm                                    | -85 dBm                                       |  |  |
| 5 GHz, 802.11ax (HE20)      | MCS11      | 16 dBm                                    | -58 dBm                                       |  |  |
| E CUE 002.44(UE40)          | MCS0       | 23 dBm                                    | -82 dBm                                       |  |  |
| 5 GHz, 802.11ax (HE40)      | MCS11      | 16 dBm                                    | -54 dBm                                       |  |  |
|                             | MCS0       | 23 dBm                                    | -79 dBm                                       |  |  |
| 5 GHz, 802.11ax (HE80)      | MCS11      | 16 dBm                                    | -52 dBm                                       |  |  |

### Software Specifications

| Software Specifications     | RG-AP810-I               |
|-----------------------------|--------------------------|
| Basic Function              |                          |
| Applicable software version | RGOS11.9(6)W1B4 or later |
| WLAN                        |                          |

| Software Specifications           | RG-AP810-I  |
|-----------------------------------|---|
| Max. number of associated<br>STAs | 256 (up to 128 STAs per radio)  |
| Max. number of BSSIDs             | 32 (up to 16 BSSIDs per radio)  |
| Max. number of WLAN IDs           | 16  |
| STA management                    | SSID hiding<br>Band steering<br>Each SSID can be configured with the authentication mode, encryption mechanism, and VLAN<br>attributes independently.<br>Remote Intelligent Perception Technology (RIPT)<br>Intelligent STA identification technology<br>Intelligent load balancing based on the STA quantity or traffic<br>Rate set settings                           |
| STA limiting                      | SSID-based STA limiting<br>Radio-based STA limiting   |
| Bandwidth limiting                | STA/SSID/AP-based rate limiting   |
| CAPWAP                            | IPv4/IPv6 CAPWAP<br>Layer 2 and Layer 3 topology between an AP and an AC<br>An AP can automatically discover the accessible AC.<br>An AP can be automatically upgraded through the AC.<br>An AP can automatically download the configuration file from the AC.<br>CAPWAP through NAT<br>Encryption over CAPWAP data channels<br>Encryption over CAPWAP control channels |
| Data forwarding                   | Centralized and local forwarding  |
| Wireless roaming                  | Layer 2 and Layer 3 roaming   |
| Wireless locating                 | MU device locating  |
| Security and Authentication       |   |
| Authentication and encryption     | Remote Authentication Dial-In User Service (RADIUS)<br>PSK, PPSK, UPSK, web, 802.1X, PEAP, WPA, WPA2 and WPA3 authentication<br>Data encryption: WEP (64/128 bits), WPA-TKIP, WPA-PSK, WPA2-AES, WPA3   |
| Data frame filtering              | Allowlist, static blocklist, and dynamic blocklist  |
| WIDS                              | Wireless Intrusion Detection System(WIDS)<br>Wireless Intrusion Protection System(WIPS)<br>User isolation<br>Rogue AP detection and containment   |
| Dynamic Policy                    | Dynamic ACL assignment based on 802.1X authentication (used with the AC)<br>CoA/DM  |

Beyond Networks

| Software Specifications | RG-AP810-I  |  |
|-------------------------|---|--|
| СРР                     | CPU Protect Policy (CPP)  |  |
| NFPP                    | Network Foundation Protection Policy (NFPP)   |  |
| Routing and Switching   |   |  |
| MAC                     | Static and filtered MAC addresses<br>MAC address table size: 1,024<br>Max. number of static MAC addresses: 1,024<br>Max. number of filtered MAC addresses: 1,024                              |  |
| Ethernet                | Jumbo frame length: 1,518<br>Full-duplex and half-duplex modes of interfaces  |  |
| VLAN                    | Interface-based VLAN assignment<br>Max. number of SVIs: 200<br>Max. number of VLANs: 4,094<br>VLAN ID range: 1–4,094  |  |
| ARP                     | ARP entry aging, gratuitous ARP learning, and proxy ARP<br>Max. number of ARP entries: 1,024<br>ARP check   |  |
| IPv4 services           | Static and DHCP-assigned IPv4 addresses<br>Max. number of IPv4 addresses configured on each Layer 3 interface: 200<br>DHCP snooping, DHCP server, and DHCP client<br>NAT, FTP ALG and DNS ALG |  |
| IPv6 services           | IPv6 addressing, Neighbor Discovery (ND), ICMPv6, IPv6 ping<br>Max. number of IPv6 addresses configured on each Layer 3 interface: 400<br>IPv6 DHCP client                                    |  |
| IP routing              | IPv4/IPv6 static route<br>Max. number of static IPv4 routes: 1,024<br>Max. number of static IPv6 routes: 1,000  |  |
| Multicast               | Multicast-to-unicast conversion   |  |
| VPN                     | PPPoE client<br>IPsec VPN   |  |
| Network Management and  | Monitoring  |  |
| Network management      | NTP server and NTP client<br>SNMPv1/v2c/v3<br>Fault detection and alarm<br>Information statistics and logging   |  |

| Software Specifications                       | RG-AP810-I  |
|---|---|
| Network management<br>platform                | Web management (Eweb)<br>RG-WS series wireless controller and Ruijie Cloud  |
| User access management                        | Console, Telnet, SSH, FTP client, FTP server, and TFTP client   |
| Switchover among Fat, Fit,<br>and cloud modes | When the AP works in Fit mode, it can be switched to Fat mode through an AC.<br>When the AP works in Fat mode, it can be switched to Fit mode through the console port or<br>Telnet mode.<br>When the AP works in cloud mode, it can be managed through Ruijie Cloud. |

#### Value-added Software

The following value-added software functions can be achieved with the WIS solution (used with RG-iData-WIS and wireless controller).

| Value-added Software | RG-AP810-I   |
|----------------------|--|
| Intelligent O&M      |  |
| Experience           | Network operation analysis, such as device stability and signal coverage<br>Measuring users' network experience based on indicators such as the latency, packet loss,<br>signal strength, and channel utilization, and visualizing results of the network experience<br>Statistics on the number of online and offline failures of STAs associated with different APs,<br>average signal strength, and other parameters<br>VIP monitoring and alarm, and custom alarm thresholds<br>STA global experience map and experience coverage evaluation based on the time range<br>STA access protocol replay and fine-grained STA fault diagnosis<br>Note: To support the preceding functions, ensure that the AP works in Fit mode. |
| Network optimization | Network performance optimization, including one-click network optimization and scenario-<br>based optimization<br>Client steering to cope with roaming stickiness, and experience indicator comparison<br>Client steering to cope with remote association, and experience indicator comparison<br>One-click diagnosis – analyzing problems and providing suggestions   |
| Big data             | Baseline analysis – recording the configuration, version, and other changes, and tracking<br>network KPI changes<br>Time capsule – analyzing the device version and configuration change history   |
| Regional analysis    | Batch generation of building floor information – uploading floor plans, and dragging and dropping AP positions   |
| One-click report     | One-click health report – generating a report on the overall operation of a network  |
| Security radar       | Unauthorized Wi-Fi signal location, presentation by category, and containment  |

INNOVATION

Beyond Networks

| Value-added Software           | RG-AP810-I  |  |
|--------------------------------|---|--|
| Cloud Management               |   |  |
| Management and<br>maintenance  | Uniformly connecting, managing, and maintaining APs, ACs, and other devices, batch device<br>configuration and upgrade, and other functions<br>Deployment through Zero Touch Provisioning (ZTP) – creating configuration templates and<br>automatically applying configured templates<br>One-click discovery of the wired and wireless network topology and topology generation |  |
| Cloud Authentication           |   |  |
| Authentication mode            | SMS authentication, fixed account authentication, one-click authentication, Facebook<br>authentication, Instagram authentication, voucher authentication, and other authentication<br>modes<br>Authentication implemented in the cloud, without the need to deploy the local authentication<br>server   |  |
| Customized portal              | Customized Portal authentication page for mobile phones and PCs   |  |
| SMS gateway                    | Interconnection with SMS gateways of GUODULINK and Alibaba Cloud  |  |
| Platform Capabilities          |   |  |
| Big data capabilities          | Mainstream persistence solutions based on Hadoop, MongoDB, and MySQL, providing<br>distributed storage capabilities<br>Spark-based big data computing capabilities<br>Data warehouse building based on Hive, and data model conversion, integration, and other<br>functions   |  |
| Hierarchy and decentralization | Authorizing different applications for different users to meet service needs of different<br>departments<br>Granting operation permissions to administrators in different scenarios   |  |
| System management              | Account operation, authorization configuration, email configuration, configuration backup, exception alarms, and other system management functions  |  |

Note: For details, refer to the latest hybrid cloud management solution.

### **Regulatory Compliance**


| Regulatory Compliance | RG-AP810-I   |
|-----------------------|--|
| Regulatory compliance | EN 55032, EN 55035, EN 61000-3-3, EN IEC 61000-3-2, EN 301 489-1, EN 301 489-3, EN 301 489-<br>17, EN 300 328, EN 301 893,EN 300 440, FCC Part 15, EN IEC 62311, IEC 62368-1, and EN 62368-1 |

\* For more country-specific regulatory information and approvals, contact your local sales agency.

# Antenna Pattern Plots


### Horizontal Planes (Top View)

The following figures show the azimuth antenna pattern at 2.4 GHz and 5 GHz radios.

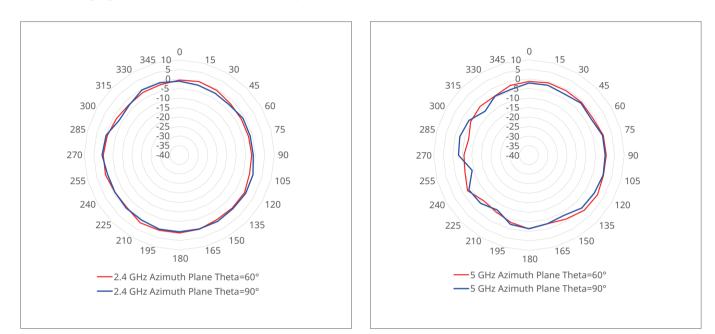

### Vertical Planes (Side View, AP Facing Down)

The following figures shows the elevation antenna pattern at 2.4 GHz and 5 GHz radios.

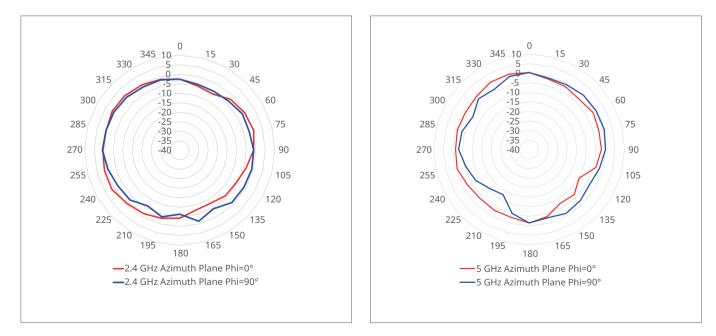

Note: Operating frequency bands are country-specific.

# Ordering Guide

Perform the following steps to configure an RG-AP810-I:

- Select the RG-AP810-I.
- If the uplink switch supports PoE power, connect the PoE switch to the AP's uplink port to provide power for the AP.
- If the uplink switch does not support PoE power, purchase Ruijie's PoE Power Injector RG-E-120(GE), with the Data In end of the interface connected to the switch and the Data & Power Out end connected to the AP uplink port to supply power to the AP.
- If the uplink switch does not support PoE power, you can also purchase a DC power module from a third-party vendor to supply power to the AP through the DC power connector.

## **Ordering Information**

| Model        | Description  |  |
|--------------|--|--|
| RG-AP810-I   | <ul> <li>Wi-Fi 6 802.11ax-compliant indoor wireless access point</li> <li>Dual radios, four spatial streams, peak data rate of 1.775 Gbps</li> <li>Radio 1: 2.4 GHz: two spatial streams, 2x2 MU-MIMO, peak data rate of 574 Mbps</li> <li>Radio 2: 5 GHz: two spatial streams, 2x2 MU-MIMO, peak data rate of 1.201 Gbps</li> <li>1 x 10/100/1000M BASE-T uplink port, supporting PoE and local DC power supply</li> <li>Binding Ruijie Cloud service lifetime license</li> <li>Note:</li> <li>The power source equipment (PSE) needs to be purchased separately. The PoE Power</li> <li>Injector can be purchased from Ruijie.</li> <li>The DC power module has to be purchased separately from a third party. The output voltage/current must be 48 V/0.3 A.</li> </ul> |  |
| RG-E-120(GE) | Single PoE Power Injector with 1000BASE-T support, supporting 802.3af  |  |

## Package Contents

| Item  | Quantity |
|---|----------|
| Main unit                                   | 1        |
| Mounting bracket                            | 1        |
| Wall anchor                                 | 2        |
| Phillips pan head screws M4 x 20 mm         | 4        |
| Warranty Card and Hazardous Substance Table | 1        |
| Hardware Installation and Reference Guide   | 1        |

# Warranty

For more information about warranty terms and period, contact your local sales agency:

- Warranty terms: https://www.ruijienetworks.com/support/servicepolicy
- Warranty period: https://www.ruijienetworks.com/support/servicepolicy/Service-Support-Summany/

Note: The warranty terms are subject to the terms of different countries and distributors.

## **More Information**

For more information about Ruijie Networks, visit the official Ruijie website or contact your local sales agency:

- Ruijie Networks official website: https://www.ruijienetworks.com/
- Online support: https://www.ruijienetworks.com/support
- Hotline support: https://www.ruijienetworks.com/support/hotline
- Email support: service\_rj@ruijienetworks.com





Ruijie Networks Co., Ltd.For more information, visit www.ruijienetworks.com or call 86-400-620-8818.